PYLE®

# PMP48iR

**40 Watt Professional Megaphone / Bullhorn Siren & Record Function, Loudspeaker & Rechargeable Lithium Battery**

**www.PyleAudio.com**

- Dry Cell Operation
- Full ABS Body, Sturdy & Lightweight
- Built-in Siren & Microphone
- Clear Sound, Long Range & Efficient Design
- Conveniently Located Volume Controls & Switch
- 10 Second Voice Recording Function
- Rechargeable Lithium Battery Included

**SPECIFICATIONS:**
Power Output: 40 Watts
Voice Range: 1000 Yards
Power Source: 6 x UM – 1 Cells (Not Included)
B – 1 Rechargeable Lithium Battery (Included)
Battery Life: 8 – 16 Hours
Microphone: Unidirectional
Dimensions: Diameter: 8" x Length: 13 1/8"
Weight: 2.46 LBS. (with Lithium Battery)
Voltage of Rechargeable Battery: DC 7.4V (B-1)
3.5 mm Aux-In for iPod/MP3 Player connectivity

**Operation**

- Open the back cover by pressing down on the 'Open' Button
- Insert 6 x UM-1 Cells or included battery then close back cover until locks into position. Be sure to insert the back of the double-orifice plug into the jack in the battery compartment. Now, you're megaphone is ready for operation.
- To activate the megaphone, press the 'ON/OFF' button on the back cover.
- When using the megaphone, place your lips as close as possible to the megaphone when speaking. Adjust the 'Volume Control' to the desired level without causing any howling or feedback.
- Press the 'Siren' button to activate alarm. To switch off the alarm, press the same button again, or press the 'ON/OFF' button.
- Adjust the volume control to the min. before recording. Press the 'REC' button and the indicator light will turn on then you are recording to use the recording function.
- The longest record time is about 10 seconds. Press the 'REC' button to initiate recording, then press again once you've entered your message. Then, press the 'Play' button to activate the recorded message circularly.

**PRECAUTIONS**

Ensure correct polarity of cells used. Insert the batteries in the correct direction by aligning the (-) marks on the batteries with the spring in the back cover.

Charge the lithium battery for 4 – 6 hours in 100 V before the first use. After the lithium battery is fully charged, the indicator light will turn from red into green.

When the megaphone is not in use for a long period of time, remove the dry cells and replace.

Drained cells or rechargeable battery will not give sufficient sound volume.

Replace cells or charge the lithium battery at regular intervals (usually three month periods), for optimum performance.

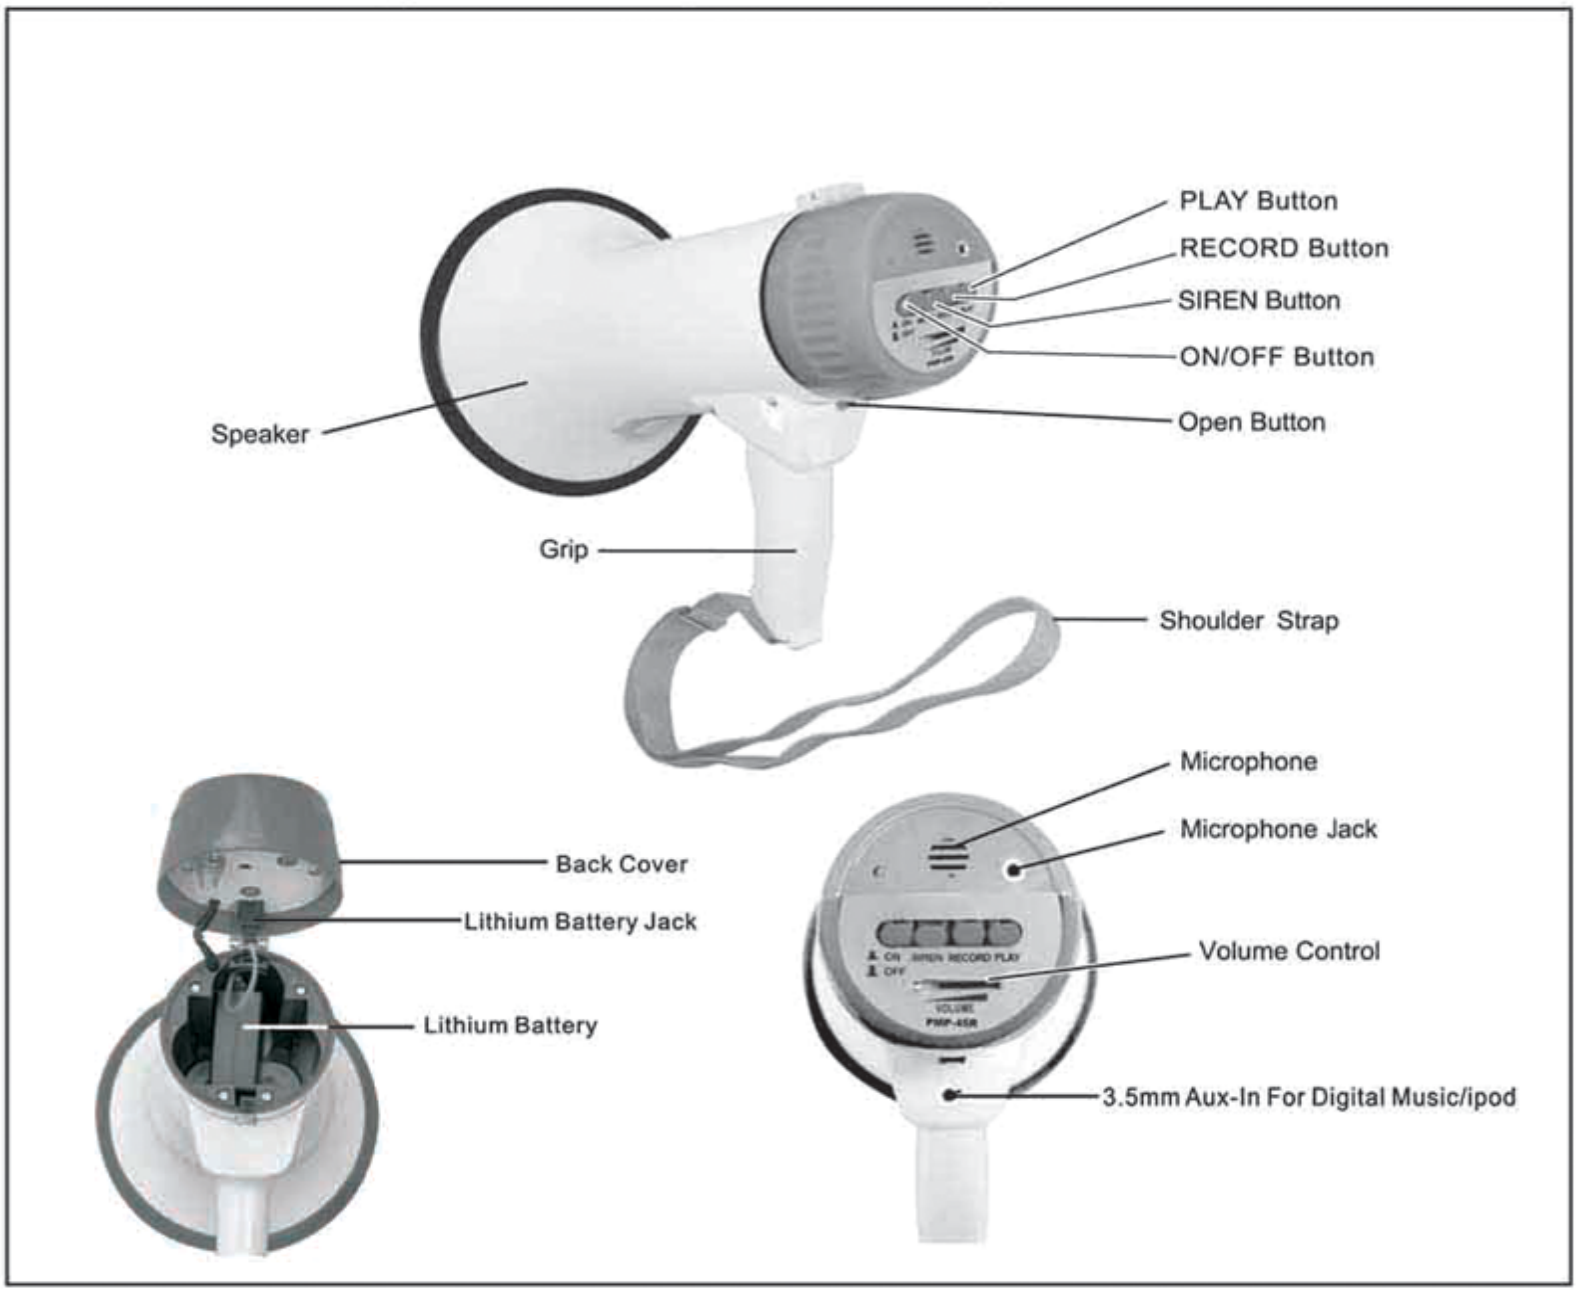


# PMP48iR

**40 Watt Professional Megaphone / Bullhorn**
**Siren & Record Function, Loudspeaker &**
**Rechargeable Lithium Battery**

**www.PyleAudio.com**